

**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

198841US-2X

First Inventor or Application Identifier

YASUSHIGE UEOKA

Title

ANTENNA FORMED FROM A PLURALITY OF STACKED BASES

**APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231Fee Transmittal Form (e.g. PTO/SB/17)  
(Submit an original and a duplicate for fee processing)**ACCOMPANYING APPLICATION PARTS**

1. ☐ Specification Total Sheets **16**
3. ☒ Formal Drawing(s)  
(35 U.S.C. 113) Total Sheets **2**
4. ☐ Oath or Declaration Total Pages
- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. §1.63(d))  
(for continuation / divisional w/ box 16 completed)
- i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in  
the prior application, see 37 C.F.R. §1.63(d)(2) and  
1.33(b).
5. ☐ CD-ROM or CD-R in duplicate, large table or Computer  
Program (Appendix)
6. ☐ Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
- a. ☐ Computer Readable Form (CRF)
- b. Specification or Sequence Listing on:
- i. ☐ CD-ROM or CD-R (2 copies); or
- ii. ☐ Paper
- c. ☐ Statements verifying identity of above copies

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ Application Data Sheet. See 37 CFR 1.76
9. ☐ 37 C.F.R. §3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure  
Statement (IDS)/PTO-1449 ☐ Copies of IDS  
Citations
12. ☐ Preliminary Amendment
13. ☒ White Advance Serial No. Postcard
14. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
15. ☐ Applicant claims small entity status.  
See 37 CFR 1.27
16. ☒ Other: Request for Priority

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application no.:

Prior application information: Examiner:

Group Art Unit:

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. Amend the specification by inserting before the first line the sentence:

☐ This application is a ☐ Continuation ☐ Division ☐ Continuation-in-part (CIP)  
of application Serial No. Filed on☐ This application claims priority of provisional application Serial No. Filed**18. CORRESPONDENCE ADDRESS****22850**

(703) 413-3000

FACSIMILE: (703) 413-2220

Name:	Gregory J. Maier	Registration No.:	25,599
Signature:		Date:	10-30-00
Name:	Surinder Sachar	Registration No.:	34,423

Docket No. 198841US-2X

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

INVENTOR(S) YASUSHIGE UEOKA

SERIAL NO: New Application

FILING DATE: Herewith

FOR: ANTENNA FORMED FROM A PLURALITY OF STACKED BASES

FEE TRANSMITTAL

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20231

FOR	NUMBER FILED	NUMBER EXTRA	RATE	CALCULATIONS
TOTAL CLAIMS	19 - 20 =	0	× \$18 =	\$0.00
INDEPENDENT CLAIMS	2 - 3 =	0	× \$80 =	\$0.00
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS (If applicable)			+ \$270 =	\$0.00
<input checked="" type="checkbox"/> LATE FILING OF DECLARATION			+ \$130 =	\$130.00
BASIC FEE				\$710.00
TOTAL OF ABOVE CALCULATIONS				\$840.00
<input type="checkbox"/> REDUCTION BY 50% FOR FILING BY SMALL ENTITY				\$0.00
<input type="checkbox"/> FILING IN NON-ENGLISH LANGUAGE			+ \$130 =	\$0.00
<input type="checkbox"/> RECORDATION OF ASSIGNMENT			+ \$40 =	\$0.00
TOTAL				\$840.00

- ☐ Please charge Deposit Account No. 15-0030 in the amount of \_\_\_\_\_ A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of **\$840.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge any additional fees which may be required for the papers being filed herewith and for which no check is enclosed herewith, or credit any overpayment to Deposit Account No. 15-0030. A duplicate copy of this sheet is enclosed.

Respectfully Submitted,

OBLON, SPIVAK, McCLELLAND,  
MAIER & NEUSTADT, P.C.

*Gregory J. Maier*

Gregory J. Maier  
Registration No. 25,599

Surinder Sachar  
Registration No. 34,423

Date: 10-30-02



**22850**

Tel. (703) 413-3000  
Fax. (703) 413-2220  
(OSMMN 10/00)

TITLE OF THE INVENTION

ANTENNA FORMED FROM A PLURALITY OF STACKED BASES

CROSS-REFERENCE TO RELATED APPLICATIONS

The present document is related to and claims priority on Japanese priority documents  
5 JP11-310352 and JP 2000-259878 filed in the Japanese Patent Office on October 24, 1999,  
and August 29, 2000, respectively, the entire contents of which are hereby incorporated  
herein by reference.

BACKGROUND OF THE INVENTION

Field of the Invention

10 The present invention relates to antennas incorporated into various apparatuses, such  
as various communication apparatuses for transmitting and receiving radio waves, which  
have functions of transmitting and receiving radio waves.

Description of the Related Art

15 Recently, various apparatuses, such as communications apparatuses for transmitting  
and receiving radio waves, which have functions of transmitting and receiving radio waves in  
a broad sense, are in increasing demand. Accordingly, an increasing number of antennas  
used within a frequency band from a few hundreds of MHz to a few GHz have been  
employed. These antennas are used in, for example, mobile communication, next-generation  
transportation systems, and non-contact cards used in automatic ticket readers. Methods for  
20 performing wireless data communication without using long, burdensome cables have been  
introduced, including wireless communication between cordless Internet appliances, wireless  
local area networks (LAN), and for Bluetooth. The above antennas are expected to be widely

used in these fields. Such antennas are also used in wireless data transmission and reception from various terminals. The demand for antennas is increasing in the fields of telemetering for communicating safety management information concerning waterworks and gas systems by radio waves, point-of-sale (POS) systems for banking terminals, and the like. Moreover, such antennas are applicable to home appliances including televisions, such as portable satellite broadcasting receivers, and for automatic vending machines. The range of uses of such antennas is very broad.

As antennas for use in apparatuses having functions of transmitting and receiving radio waves, retractable monopole antennas, which are mounted on casings of apparatuses, are mainly used. In addition, helical antennas, which slightly protrude to the outside of the casings, are known.

The background antennas, such as monopole antennas, are disadvantageous in that it is burdensome to handle monopole antennas and in that monopole antennas are easily damaged since they are required to be extended during used. Helical antennas are disadvantageous in that, since antenna elements formed of air core coils are protected by covering materials such as a resin, the outer dimensions tend to be greater. When helical antennas are fixed so that they protrude from casings, the overall appearance is not satisfactory.

## SUMMARY OF THE INVENTION

In order to address the above mentioned and other problems, it is an object of the present invention to provide a small antenna to be attached to the interior of a casing of various types of apparatuses, including various communication apparatuses for transmitting and receiving radio waves, which have functions of transmitting and receiving radio waves,

so that it is not necessary to extend the antenna, so that the antenna is not easily damaged, and so that the overall appearance of the apparatuses is not worsened.

According to an aspect of the present invention, an antenna is provided including a plurality of bases stacked in the thickness direction. Conductor patterns are formed on the bases, and conducting sections for electrically interconnecting the conductor patterns are formed on the bases. The conductor patterns form inductance components and capacitance components.

With such a configuration, a resonant system required to transmit and receive radio waves is configured with the inductance components and the capacitance components, and hence the resonant system functions as an antenna.

Among the conductor patterns formed on the bases, a capacitance component may be constructed of a conductor pattern formed on a first base and a conductor pattern formed on a second base. An inductance component may be constructed of at least one of those two conductor patterns. The capacitance component and the inductance component may be connected in parallel.

With such a configuration, the capacitance component and the inductance component formed of the conductor patterns are connected in parallel to form the resonant system required to transmit and receive radio waves, which functions as the antenna.

The conductor patterns may include capacitance patterns and inductance patterns. Among the bases, an inductance pattern may be formed on a first base. A first capacitance pattern may be formed on a second base adjoining the first base. A second capacitance pattern, which is opposed to the first capacitance pattern to form a capacitance component, may be formed on a third base adjoining the second base. The inductance pattern and the capacitance component formed by the first and the second capacitance patterns may be

connected in parallel by the connecting section.

With such an arrangement, the capacitance component and the inductance component formed of the conductor patterns are connected in parallel to form the resonant system required to transmit and receive radio waves, which functions as the antenna.

5        On a surface of the outermost base among the bases, a shielding conductor pattern may be formed so as to be exposed to the outside. In plan view, the shielding conductor pattern may be disposed on the conductor patterns formed on other of the bases.

10        With such an arrangement, the shielding conductor pattern shields the antenna from radio waves. When transmitting radio waves, no radio waves are emitted in the conductor pattern direction. The antenna is also shielded from electromagnetic noise from the conductor pattern direction.

15        A power feeding port may be formed on the surface of the outermost base so as to be exposed to the outside. A connecting section to be connected to another electronic component may be configured by the power feeding port and the shielding conductor pattern.

20        With such an arrangement, the parts to be connected with another electronic component, namely the power feeding port and the shielding conductor pattern, are coplanar. Hence, the antenna can be mounted on the electronic component at the coplanar surface.

      A trimming pattern for trimming the impedance of the entire antenna may be formed on the bases.

20        With such a configuration, the impedance of the entire antenna can be changed to an arbitrary value by altering the shape of the trimming pattern in accordance with the necessary frequency.

      The conducting sections may include through holes formed in the thickness direction of the bases.

With such an arrangement, in plan view, the conductor patterns are configured to be connected at a single point.

Preferably, the bases are protected by a covering while the shielding conductor pattern and the power feeding port are exposed to the outside.

5        According to the present invention, a small antenna is provided, which can be attached to the interior of a casing of each of various apparatuses, such as portable communication terminals, which have functions of transmitting and receiving radio waves. It is thus not necessary to extend the antenna, and hence the antenna is not easily damaged and the overall appearance is improved. The present invention is particularly advantageous when used in a frequency bands with a long wavelength, such as with the very high frequency (VHF) band and the ultra high frequency (UHF) band. By stacking a plurality of bases, a plurality of resonance modes are obtained by a plurality of capacitance components while the overall length remains the same.

10        According to the present invention, transmission of radio waves in the conductor pattern direction is blocked. Therefore, the antenna gains in the direction of areas in which the conductor patterns are absent are improved. It is thus possible to increase the transmission distance compared with a case in which no conductor pattern is used. At the same time, the antenna is shielded from noise from a radio transmitting and receiving circuit. It is thus possible to directly mount the antenna on a circuit board, allowing more freedom in  
15        choosing the mounting location. This is advantageous in that the antenna can be attached to the interior of a casing of each of the apparatuses having functions of transmitting and receiving radio waves.  
20

      According to the present invention, a connection section can be connected with solder to another electronic component, such as a printed board forming a radio transmitting and

receiving circuit. This allows space saving when attaching the antenna to the interior of a casing of each of various apparatuses having functions of transmitting and receiving radio waves. The present invention is advantageous for trimming the impedance between a resonant system and a radio transmitting and receiving circuit system to be connected to the resonant system. When connecting a plurality of conductor patterns, no space is necessary. This is advantageous for the reduction of the outer dimensions. An exposed surface can be used as a mounting surface to be mounted on a transmission circuit board. Once the antenna is mounted, effects of oxidation of the conductor patterns and damage caused by external forces on radio transmission and reception are minimized.

#### BRIEF DESCRIPTION OF THE DRAWINGS

A more complete appreciation of the present invention and many of the attendant advantages thereof will be readily obtained as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings, wherein:

Fig. 1 is a perspective view of an antenna according to an embodiment of the present invention, part of the antenna being omitted; and

Fig. 2 is a front view of conducting sections illustrating positional relationships between conducting sections of the antenna of the present invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention will be understood from the following description of the preferred embodiment taken in conjunction with the accompanying drawings, in which like reference numerals designate identical or corresponding elements throughout the figures.



Referring to Figs. 1 and 2, an antenna A includes a plurality of bases 1 to 4 stacked in the thickness direction. Conductor patterns 5 to 9 are formed on the bases 1 to 4, respectively, and conducting sections (through holes) 10 to 13 for electrically interconnecting the conductor patterns 5 to 9 are provided.

5 On surfaces of the bases 1 to 4, the conductor patterns can be formed of noble metals such as gold, silver, etc., by printing or the like. Subsequent to perforating the bases 1 to 4, the bases 1 to 4 are stacked one after another. The perforated holes are filled with conductive materials, and hence the through holes are formed. The bases 1 to 4 are baked and integrated.

10 The conductor patterns 5 to 9 include capacitance patterns 6a and 7a, which mainly contribute to forming capacitance components, and inductance patterns 5a, which mainly contribute to forming inductance components.

15 The conductor pattern 5 formed on the base 1 (first base) is formed of a zigzag conductor (inductance patterns 5a) arranged with a predetermined pitch. The conductor pattern 5 includes linear sections 5b at both ends thereof.

20 The conductor pattern 6 formed on the base 2 (second base) and the conductor pattern 7 formed on the base 3 (third base) are formed including the capacitance patterns 6a and 7a, which may be a plurality of rectangular patterns each having a linear section at one end. In plan view, these patterns 6a and 7a of the conductor patterns 6 and 7 are disposed so that one capacitance pattern is superposed on the other capacitance pattern.

The conductor pattern 8 includes a capacitance pattern 8a. The capacitance pattern 8a is formed as a single rectangular pattern on the base 4.

The conductor pattern 9 includes a pattern 9a serving both as a capacitance pattern and a shielding pattern. The conductor pattern 9 is formed as a connecting section to be

connected to a printed board which forms a radio transmitting and receiving circuit. The conductor pattern 9 is formed on the outermost base 4 so as to be exposed to the outside. In this case, in plan view, the pattern 9a is disposed so as to overlap with the conductor patterns formed on the other bases.

5           The patterns 6a of the conductor pattern 6 and the patterns 7a of the conductor pattern 7 are connected to both ends of the patterns 5a.

The conductor pattern 8 is connected to one terminal of the conductor pattern 5 by the conducting sections 10 to 12.

10           The conductor pattern 9 is connected to the other terminal of the conductor pattern 5 by the conducting sections 10 to 13.

15           A power feeding port 14, which forms the connecting section to be connected to the printed board forming the radio transmitting and receiving circuit, is provided outside the outermost base 4. The power feeding port 14 is connected to the conductor pattern 5 through the conducting sections 10 to 13. In this configuration, the pattern 5b of the conductor pattern 5 and the conducting sections 10 to 13 form a trimming pattern 16.

Referring to Fig. 2, a protective covering 15 made of, e.g., synthetic resin is provided outside the entirety of the stacked bases 1 to 4 while the conductor pattern 9 and the power feeding port 14 are exposed to the outside.

20           According to the antenna, inductance components are formed by the patterns 5a of the conductor pattern 5, and capacitance components are formed between the conductor patterns 6 and 7. The inductance components and the capacitance components form parallel resonant circuits, which function as a resonant system required to transmit and receive radio waves. The parallel resonant circuits are connected in series, and the overall length thereof forms a radio transmitter and receiver, thereby constructing an array-type antenna. In this

configuration, a predetermined resonant frequency is set based on the length of the patterns 5a of the conductor pattern 5, the inductance given by the linear sections of the conductor patterns 6 and 7 and the conducting sections 10 to 13, the areas of the patterns 6a and 7a of the conductor patterns 6 and 7, and the distance between the conductor patterns.

5           According to the antenna, the inductance components and the capacitance components formed by the conductor patterns 5 to 9 form the resonant system required to transmit and receive radio waves, which functions as an antenna.

10           The patterns 5a of the conductor pattern 5 can emit horizontal wave components in the diagonal direction of the zigzag sides and vertical wave components along the intersections of the zigzag sides. When the antenna is formed on the same plane at positions differing in the right-angle direction, radio waves of horizontally polarized waves and vertically polarized waves can be transmitted and received in a more satisfactory manner.

15           Since the pattern 9a of the conductor pattern 9 shields the antenna from radio waves, radio transmission in this direction is blocked. The antenna gains in the opposite direction are improved. Compared with a case in which no conductor pattern 9 is used, the transmission distance is increased. At the same time, the antenna is shielded from noise from the radio transmitting and receiving circuit. Accordingly, it is possible to directly mount the antenna on a circuit board and to allow freedom in selecting the mounting location. This is advantageous in that the antenna can be attached to the interior of a casing of each of various  
20           apparatuses having functions of transmitting and receiving radio waves.

          The conductor pattern 9 and the power feeding port 14 are formed on the surface of the outermost base 4 to be exposed to the outside, and this section is regarded as the connecting section. Hence, it is possible to directly mount the antenna with solder on a printed board, which forms the radio transmitting and receiving circuit, at that surface. This

allows space saving when attaching the antenna to the interior of a casing of each of various apparatuses having functions of transmitting and receiving radio waves.

The inductance components are formed by the linear section 5b of the conductor pattern 5, which extends from the position at which the power feeding port 14 is connected to the conductor pattern 5 to the terminal of the conductor pattern 5, and the conducting sections 10 to 13 toward the conductor pattern 9. Hence, the impedance of the entire antenna can be trimmed. It is thus possible to trim the impedance between the entire antenna and the radio transmitting and receiving circuit system to be connected to the antenna.

Since the conducting sections 10 to 13 are formed of the through holes formed in the thickness direction of the bases 1 to 4, no space is required when connecting a plurality of conductor patterns. This is advantageous in allowing for the reduction of the outer dimensions of the antenna. In this case, glass epoxy instead of ceramic can be used to form the bases 1 to 4. The holes may then be coated with conductor materials, and the through holes may then be formed. Alternatively, the through holes may be filled with a paste and baked. This is advantageous for reducing the impedance of the antenna.

Since the bases 1 to 4 are protected by the covering 15 while the conductor pattern 9 and the power feeding port 14 are exposed to the outside, the antenna can be mounted on a transmitting circuit board at the exposed surface, i.e., the mounting surface. Once the antenna is mounted, it is possible to minimize effects of oxidation of the conductor patterns and damage caused by external forces on radio transmission and reception.

Obviously, numerous modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims, the present invention may be practiced otherwise than as specifically described herein.

Claims:

1. An antenna comprising:

a plurality of bases stacked in a thickness direction;

conductor patterns formed on the plurality of bases, respectively; and

5 a conducting section configured to electrically interconnect the conductor patterns formed on the plurality of bases;

wherein the conductor patterns form at least one inductance component and at least one capacitance component.

2. An antenna according to claim 1, wherein:

10 the at least one capacitance component is formed by, among the conductor patterns formed on the plurality of bases, a first conductor pattern formed on a first base of the plurality of bases and a second conductor pattern formed on a second base of the plurality of bases;

15 at least one of the first and second conductor patterns forms the inductance component; and

the capacitance component and the inductance component are connected in parallel by the conducting section.

3. An antenna according to claim 1, wherein:

a first inductance pattern is formed on a first base of the plurality of bases;

20 a first capacitance pattern is formed on a second base of the plurality of bases adjoining the first base;

a second capacitance pattern, which is opposed to the first capacitance pattern to form said at least one capacitance component, is formed on a third base of the plurality of bases adjoining the second base; and

the first inductance pattern and the at least one capacitance component formed by the first and the second capacitance patterns are connected in parallel by the conducting section.

4. An antenna according to claim 1, further comprising a shielding conductor pattern formed on a surface of an outermost base of the plurality of bases, the shielding conductor pattern being exposed to the outside, and in plan view, the shielding conductor pattern being superimposed on the conductor patterns formed on other bases of the plurality of bases.

5. An antenna according to claim 4, further comprising:

a power feeding port formed to be exposed outside the surface of the outermost base;

and

wherein the power feeding port and the shielding conductor pattern are used as a connecting section to be connected to another electronic component.

6. An antenna according to claim 4, further comprising a trimming pattern configured to trim an impedance of the antenna formed on the plurality of bases.

7. An antenna according to claim 1, wherein the conducting sections include through holes formed in the thickness direction of the plurality of bases.

8. An antenna according to claim 5, further comprising a cover protecting the

plurality of bases while the shielding conductor pattern and the power feeding port are exposed to the outside.

9. An antenna according to claim 2, further comprising a shielding conductor pattern formed on a surface of an outermost base of the plurality of bases, the shielding conductor pattern being exposed to the outside, and in plan view, the shielding conductor pattern being superimposed on the conductor patterns formed on other bases of the plurality of bases.

10. An antenna according to claim 3, further comprising a shielding conductor pattern formed on a surface of an outermost base of the plurality of bases, the shielding conductor pattern being exposed to the outside, and in plan view, the shielding conductor pattern being superimposed on the conductor patterns formed on other bases of the plurality of bases.

11. An antenna according to claim 9, further comprising:  
a power feeding port formed to be exposed outside the surface of the outermost base;  
and  
wherein the power feeding port and the shielding conductor pattern are used as a connecting section to be connected to another electronic component.

12. An antenna according to claim 10, further comprising:  
a power feeding port formed to be exposed outside the surface of the outermost base;  
and  
wherein the power feeding port and the shielding conductor pattern are used as a

connecting section to be connected to another electronic component.

13. An antenna according to claim 11, further comprising a cover protecting the plurality of bases while the shielding conductor pattern and the power feeding port are exposed to the outside.

5 14. An antenna according to claim 12, further comprising a cover protecting the plurality of bases while the shielding conductor pattern and the power feeding port are exposed to the outside.

15. An antenna comprising:  
a plurality of base means stacked in a thickness direction;  
conductor means for conducting formed on the plurality of base means; and  
interconnecting means for electrically interconnecting the conductor means formed  
on the plurality of base means;  
wherein the conductor means forms at least one inductance means and at least one  
capacitance means.

15 16. An antenna according to claim 15, further comprising shielding means for shielding the plurality of base means.

17. An antenna according to claim 16, further comprising:  
power feeding means for connecting to another electronic component.



18. An antenna according to claim 16, further comprising trimming means for trimming an impedance of the antenna formed on the plurality of base means.

19. An antenna according to claim 17, further comprising covering means for protecting the plurality of base means.

## ABSTRACT OF THE DISCLOSURE

An antenna includes a plurality of bases stacked in a thickness direction, conductor patterns formed on the bases, respectively, and conducting sections for electrically interconnecting the conductor patterns. The conductor patterns form inductance components and capacitance components.

5

Fig.1


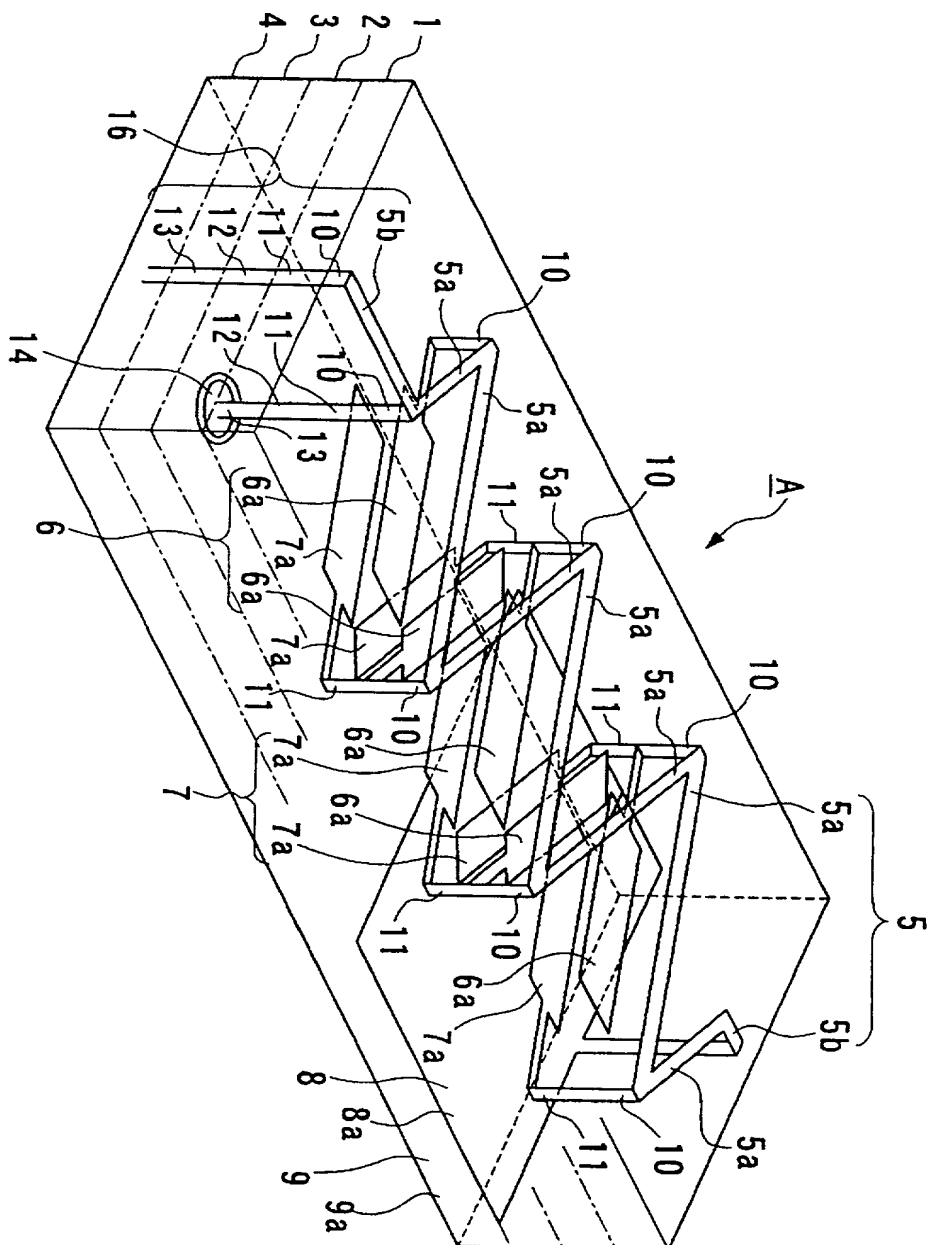


Fig. 2

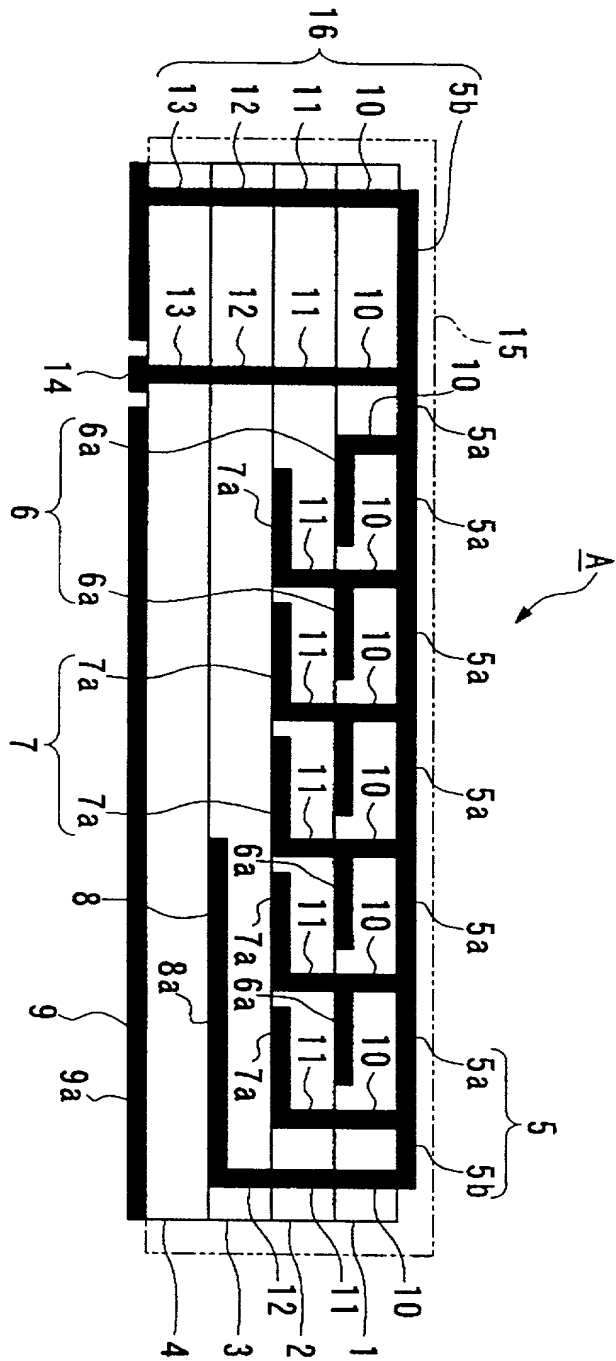

Docket No. 198841US-2X

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

IN RE APPLICATION OF: YASUSHIGE UEOKA, ET AL.

FILING DATE: Herewith

FOR: ANTENNA FORMED FROM A PLURALITY OF STACKED BASES

**LIST OF INVENTORS' NAMES AND ADDRESSES**

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20231

SIR:

Listed below are the names and addresses of the inventors for the above-identified patent application.

YASUSHIGE UEOKA	OMIYA-SHI, SAITAMA, JAPAN
TAKAO YOKOSHIMA	OMIYA-SHI, SAITAMA, JAPAN
SHIRO SUGIMURA	KANAZAWA-SHI, ISHIKAWA, JAPAN

A declaration containing all the necessary information will be submitted at a later date.



**22850**

Tel. (703) 413-3000  
Fax. (703) 413-2220  
(OSMMN 11/98)

Respectfully Submitted,

OBLON, SPIVAK, McCLELLAND,  
MAIER & NEUSTADT, P.C.

Gregory J. Maier

Registration No. 25,599

Surinder Sachar

Registration No. 34,423